

**1/3-inch, 1/2-inch
single CCD type color camera**

KP-D20A/B



***Very small, high quality images, high sensitivity,
Multi purpose color camera
KP-D20A/B is smaller than KP-D20 as volume
1/5 approx. and mass 1/3 approx.***

Features

- **Small and light weight**
44 (W) × 44 (H) × 49 (D) mm 130 g approx.
- **High sensitivity**
Minimum illumination (F 1.2, AGC 31 dB) KP-D20A : 1.5 lx KP-D20B : 1.0 lx
- **Y/C outputs and RS-232C Control is provided**
- **Digital zoom**
The screen can be smoothly enlarged up to 4 times.
- **Multi Function**
Picture control parameters can also be adjusted with the aid of on-screen menus, thus enabling optimum adjustments to match the application.

Principal features and Specifications

Item	model	KP-D20A	KP-D20B
Pickup element		Interline transfer type CCD (with on-chip microlenses)	
Total pixels		NTSC : 811 (H) × 508 (V)	PAL : 795 (H) × 596 (V)
Effective pixels		NTSC : 768 (H) × 494 (V)	PAL : 752 (H) × 582 (V)
Scanning area		equivalent to 1/3-inch pickup tube NTSC : 4.88 (H) × 3.66 (V) mm PAL : 4.89 (H) × 3.64 (V) mm	equivalent to 1/2-inch pickup tube NTSC : 6.45 (H) × 4.84 (V) mm PAL : 6.47 (H) × 4.83 (V) mm
Unit cell size		NTSC : 6.35 (H) × 7.4 (V) μm PAL : 6.5 (H) × 6.25 (V) μm	NTSC : 8.4 (H) × 9.8 (V) μm PAL : 8.6 (H) × 8.3 (V) μm
Sync system		Internal	
Video signal output		Composite video : 1.0 Vp-p/75 Ω unbalanced BNC Y/C Y:1.0 Vp-p C:0.3 Vp-p (Burst) 75 ohms unbalanced 4pin (C7648-01-201)	
Remote control		RS-232C Round multi-connector, 4 pin (HR10A-7R-4SB)	
S/N		More than 50 dB (luminance signal, standard gain, enhancer and gamma off)	
Resolution		Horizontal NTSC More than 480 TV lines Vertical NTSC More than 350 TV lines	PAL More than 470 TV lines PAL More than 450 TV lines
Scene illumination range		1.5 to 100,000 lx (F1.2, Auto-iris lens)	1.0 to 100,000 lx (F1.2, Auto-iris lens)
AGC		selectable : off, 6, 12, 21 and 31 dB (factory setting is 21 dB)	
Electronic shutter speed		1/60 (PAL:1/50), 1/100 (PAL:1/120), 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000, 1/20000, 1/30000 second, and Auto	
Backlight Compensation		On/off switchable Sensing areas: selectable from 9 areas	
Auto-iris lens outputs		(a)Video signal input type lens Luminance signal:1.0 Vp-p/high impedance Power supply : 12 V DC 60 mA (b)Iris control voltage input (galvanometer) type lens Coupling coil impedance Damper : 1150 Ω ± 10 % , Drive : 190 Ω ± 10 %	
White balance		Selectable auto-tracking (ATW), preset (AWC), manual (MANUAL) (R/B gain adjustment)	
Digital zoom		Enlarged up to 4 times smoothly	
Text display		One line of up to 24 alphanumeric characters selectable display position	
Power supply		12 V DC ± 10%	
Power consumption		220 mA approx. (including Auto-iris lens Power supply)	
Lens mount		CS mount (C mount adaptor (LA-D20AB) optionally)	
Camera mount		Tripod adaptor (TA-D20AB) optionally	
Ambient temperature		-10 to +50 °C (+14 to +122 F), 30 to 80 % RH (Note)	
Storage ambient		-20 to +60 °C (-4 to +140 F), 20 to 90 % RH	
Vibration endurance		Less than 29 m/s ² , 10 to 55 Hz 30 minutes each on XYZ axes	
External dimensions		44 (W) × 44 (H) × 49 (D) mm (not including lens and protrusions)	
Mass		130 g (4.6 oz) Approx. (not including lens and protrusions)	

Note : If operate continuously, be sure to use at less than +40 °C (104 F) for long term stable performance.


Supplied equipment

Camera 1
Operating instructions 1

Optional accessories

Lens (see operating instructions)
Lens plug (E4-191J-100)
Tripod adaptor (TA-D20AB)
C mount adaptor (LA-D20AB)
Remote plug (HR10A-7P-4P(01))
DC IN plug (R03-P3F)
AC adaptor (AP-130)

External view

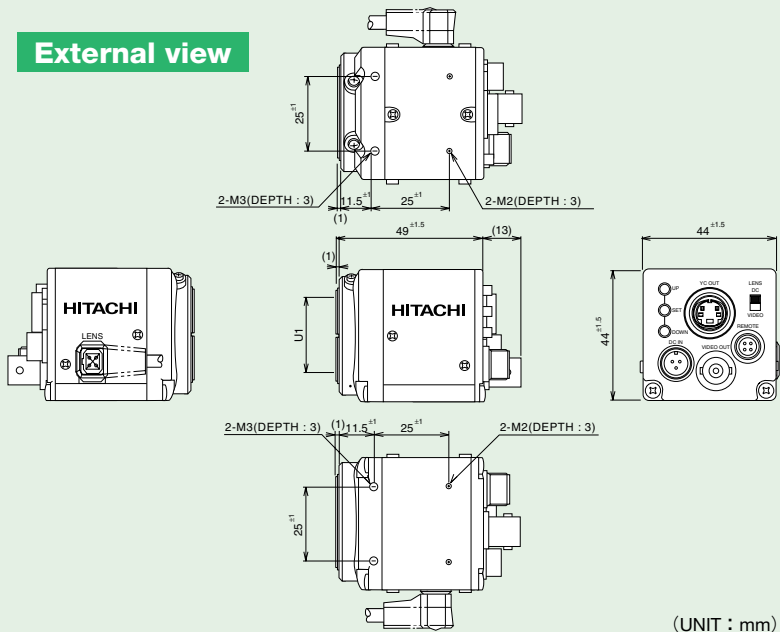

Hitachi Kokusai Electric Inc.

Head Office : 14-20, Higashi-Nakano 3-choume, Nakano-ku, Tokyo 164-8511, Japan
Phone : (03) 5363-6111, Fax : (03) 5363-9119 <http://www.h-kokusai.com>

International Sales Operation's Division

1, Kanda Izumi-cho Chiyoda-ku Tokyo 101-0024, Japan
Phone : (03)5821-5311, Fax : (03) 5821-5394

Beijing Office

Beijing Fortune Building 5, Dong San Huan Bei-Lu, Chao Yang District, Beijing, 100029 China
Phone : (10) 6590-8755/8756, Fax : (10) 6590-8757

Hitachi Denshi America, Ltd.

Headquarters and Northeast Office : 150 Crossways Park Drive, Woodbury, New York 11797, U. S. A.
Phone : (516) 921-7200, Fax : (516) 496-3718

West Office : 371 Van Ness Way, Suite 120 Torrance, CA, 90501, U. S. A.
Phone : (310) 328-6116, Fax : (310) 328-6252

Midwest Sales : Phone : (877) 326-8104, Fax : (516) 496-3718

Service (734) 721-6180

South Sales : Phone : (877) 326-8105, Fax : (516) 496-3718

Service (678) 937-0201

Parts Center : Phone : (516) 682-4435, Fax : (516) 921-0993

Latin Sales : Phone : (516) 682-4420, Fax : (516) 496-3718

Hitachi Denshi Canada, Ltd.

Head Office : 1 Select Avenue Unit#14 Scarborough, Ontario M1V 5J3, Canada.
Phone : (416) 299-5900, Fax : (416) 299-0450

Eastern Office : 5795 Chemin St. Francois St. Laurent, Quebec H4S 1B6, Canada
Phone : (514) 332-6687, Fax : (514) 335-1664

Ottawa Office : 9 Antares Drive, Nepean, Ontario, K2E 7M5, Canada
Phone : (613) 727-3930, Fax : (613) 825-4253

Hitachi Denshi (Europa) GmbH

Head Office : Westkircher Straße 88, Jügesheim D-63110 Rodgau, Germany
Phone : (6106) 6992-0, Fax : (6106) 1690-6

Hitachi Denshi (U. K.) Ltd.

Head Office : 14 Garrick Industrial Centre, Irving Way, Hendon, London, NW96 AQ, United Kingdom
Phone : (208) 202-4311, Fax : (208) 202-2451

Leeds Office : Brookfield House, Selby Road, Garforth, Leeds LS25 1NB United Kingdom
Phone : (113) 287-4400, Fax : (113) 287-4260

Specification are subject to change without notice.